




CASE PACKER

FULLY AUTOMATIC CARTRIDGE CASE PACKER FI-CH

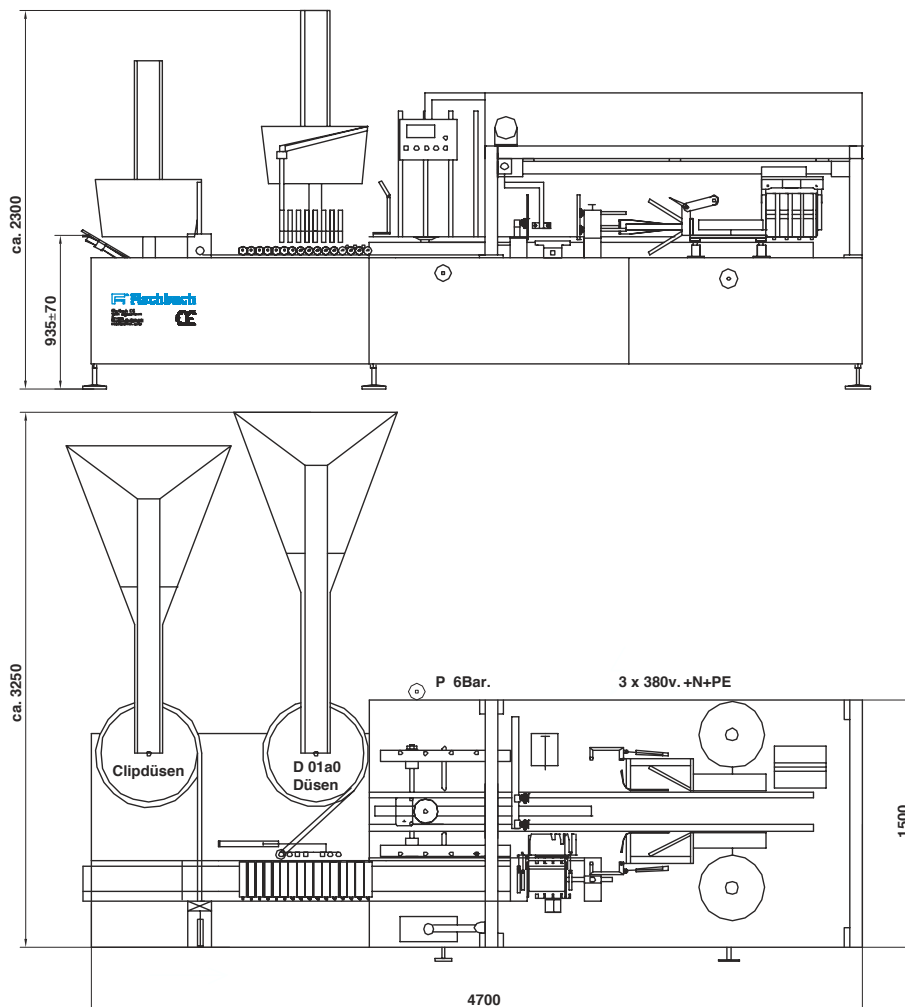

From the Fischbach machinery line for cartridge filling, accessorizing and case packing.

Fischbach KG
51766 Engelskirchen, Germany
Telefon: +49 (0) 2263 6090
info@fischbach-fi.com

Fischbach Ibérica, S.A.
17410 Sils (Girona), Spain
Telefon: +34-972-16 84 87
spain@fischbach-fi.com

Fischbach Belgium N.V.
9140 Temse, Belgium
Telefon: +32-3-710 96 20
belgium@fischbach-fi.com

Fischbach USA Inc.
Elizabethtown, Kentucky, 42701 USA
Telefon: +1-270-7 69 93 33
usa@fischbach-fi.com

Fischbach Korea Co., Ltd.
Songpa-Gu, Seoul, Korea
Telefon: +82 2 425 3092
korea@fischbach-fi.com

Fischbach (Shanghai) Co., Ltd.
Shanghai, China 201708
Telefon: +86-21-6979-1423
china@fischbach-fi.com

Fischbach U.K. Ltd.
Cheshire WA7 1SN, Great Britain
Telefon: +44-1928-579320
uk@fischbach-fi.com

www.fischbach-fi.com



CASE PACKER

FULLY AUTOMATIC CARTRIDGE CASE PACKER FI-CH

Fischbach Cartridge Case Packer Fi-CH: Up to 80 cartridges per minute, fully automatically accessorized and packed.

FEATURES

- > Packages all kinds of plastic, aluminum or cardboard cartridges in one or two-piece version.
- > The overhead „gripper carriage“ supports the cardboard box during filling and throughout it's way along the taping units. This guarantees 100% stability of the packing process with less sensitivity to box variances.
- > The compact modular design enables the machine to be optimally adapted to customer's individual packaging requirements, while taking up a minimum of space.
- > Accessorizing with clip nozzles and adding of standard nozzles in a fully integrated, automatic operating cycle.
- > Well designed system for easily adjusted case formats - quickly and simple - change of format accomplished within less than five minutes.
- > With a packaging performance rate of 80 cartridges per minute the Fi-CH packer is the ideal supplement to any filling line.
- > Trouble-free operation due to latest process control and operator interface.
- > Superior safety devices in compliance with European CE-Standard.

TECHNICAL DATA

Output: Up to 80 cartridges per minute (depending on the format of the carton)

Types of Cartridges: All standard cartridges

Packaging Formats: 2x3, 2x4, 2x5, 2x6, 3x4, 3x5, 3x6, 4x4, 4x5, 4x6, 5x4, 5x5 and 5x6 cartridges per carton

Nozzle Accessorizing: 1. Automatic clip nozzle stations (rate: 65 nozzles per minute) 2. Fully automatic adding of standard nozzles to the carton

Sealing of carton: Integrated in the packer

Voltage: 3x400V, 50 Hz or as requested

power consumption: 1.6 kw

Fuses: 10 ampere

Control Voltage: 24 V (internally)

Process Control: Siemens PLC

Air Pressure: 6 bar minimum (90 psi.)

Air Consumption: 820 NL per minute

Weight: 1,400 kg



Fischbach KG
51766 Engelskirchen, Germany
Telefon: +49 (0) 2263 6090
info@fischbach-fi.com

Fischbach Ibérica, S.A.
17410 Sils (Girona), Spain
Telefon: +34-972-16 84 87
spain@fischbach-fi.com

Fischbach Belgium N.V.
9140 Temse, Belgium
Telefon: +32-3-710 96 20
belgium@fischbach-fi.com

Fischbach USA Inc.
 Elizabethtown, Kentucky, 42701 USA
Telefon: +1-270-7 69 93 33
usa@fischbach-fi.com

Fischbach Korea Co., Ltd.
Songpa-Gu, Seoul, Korea
Telefon: +82 2 425 3092
korea@fischbach-fi.com

Fischbach (Shanghai) Co., Ltd.
Shanghai, China 201708
Telefon: +86-21-6979-1423
china@fischbach-fi.com

Fischbach U.K. Ltd.
Cheshire WA7 1SN, Great Britain
Telefon: +44-1928-579320
uk@fischbach-fi.com

www.fischbach-fi.com